



MODEL# LEDGREEN-H2UFO100W275K

### SPECIFICATIONS

**Input Voltage** : 100-277 VAC 480 Volt Available  
**Input Wattage** : 100  
**Power Factor** : >0.95  
**Operating Frequency** : 50/60hz  
**LED Count** : 210  
**Led Type** : Lumiled 3030  
**Delivered Lumens (Lm)** : 13,000  
**Efficacy Lm/Watt** : 130  
**Color Rendering Index (CRI)** : 70  
**Color Temperature** : 3000-6000  
**Beam Angle Degrees** : 105  
**Lens Cover** : PC Frosted or Transparent  
**Driver Type** : Meanwell  
**Net Weight** : 7.7 kg  
**Connection Options** : 3 core 18 AWG  
**Mounting Options** : Chain, Pendant, Ceiling Mount, Suspended Mount  
**Dimming Capability** : 20%  
**L70 Life (Hours)** : 70,000  
**Warranty** : 5 year  
**Product Length** : 400mm  
**Product Height** : 190mm  
**IP Rating** : 65  
**Construction Material** : Magnesium Alloy and PC  
**Dimmable** : Yes  
**Certification**: UL Listed, PG&E Certified, DLC, RoHs, FCC, CE, C-Tick, PSE,  
 Product Testing: LM-79, LM-80, IES ,

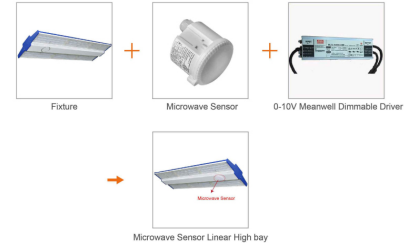

Microwave Sensor



Daylight Sensor

